


S. 251

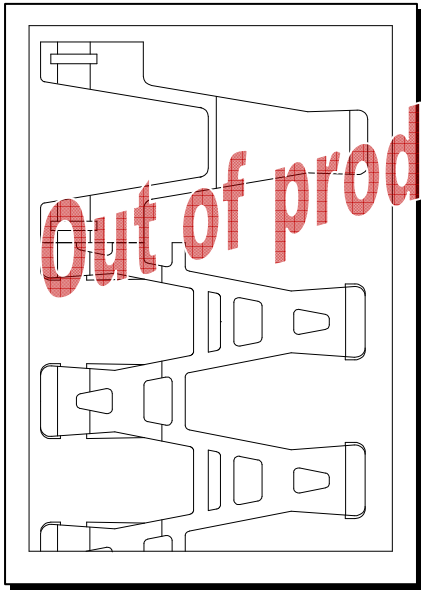

Belt data		
Materials	Max. belt pull kg	Belt weight kg/m ²
Polyacetal (POM)	250	9
Polypropylene (PP)	140	7,5

Belt surface: Smooth.
Open area: 67 %
Strength: An ideal choice for light transportation.
Material/colour: POM, PP
Cleanability: Good
Accessories: 3 mm flight buds made in friction material or POM/PP.
Application: Spiral coolers, radius conveyors.
Construction: 44 mm side modules, 200 mm centre modules.
Width interval: Normal 33 mm. E.g: 84 mm, 117 mm, 150 mm etc.
 Contact Scanbelt.

Sprocket data				
No. of teeth Z	A= Outside diameter mm.	B= Pitch diameter mm.	C= Inside diameter mm.	Bore mm.
6-POM	116	104	92	flex.
11-POM	189	177	166	30
11-POM	189	177	166	40
11-POM	189	177	166	45
11-POM	189	177	166	40x40
11-steel	189	177	166	flex.

