


S.06-401

Transport of products that require a very small transfer, runs on 7 mm nose bar.
FDA approved.



SCANBELT
...keeping industry moving...

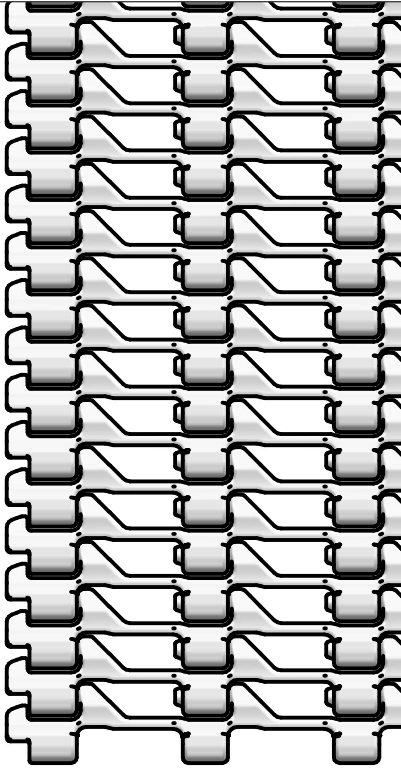

PROTECTED BY THE EU DESIGN REGISTRATION

SUGGESTED INDUSTRIES



STANDARD FEATURES


Belt surface	Open belt with a smooth surface
Open area	40 %. Biggest opening 4 x 8 mm.
Strength	Ideal choice for light transportation
Cleanability	Excellent. FSIS
Standard width	Increments of 40 mm, e.g. 200 mm, 240 mm etc.

BELT DATA

Belt materials	Temperature range		Max. belt pull kg/m of width	Belt weight kg/m ²	Standard Colours
	Min.	Max.			
POM	- 43	95	250	2,8	Natural

ACCESSORIES

Type	mm
Flights	-
Scoop Flights	-
Bent Flights	-
Supported Flights	-
Flights fitted with a Round Top	-
Side Guards	-
Friction Top	-
Hold-downs	-

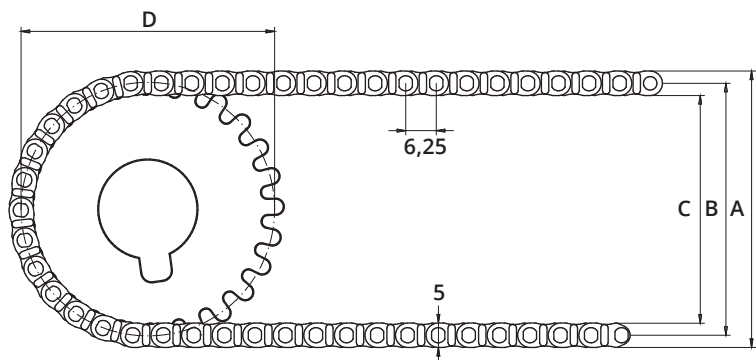

SPROCKET DATA

A = Outside, B = Pitch, C = Inside, D = Pitch Circle Diameter

No. Teeth	A	B	C	D	Hub Width	Round Bore		Square Bore	
	mm	mm	mm	mm		mm	Inch	mm	Inch
20	45	40	35	40	6	20			
36	77	72	67	72	6	20 / 25	1	25	
48	100	95	90	96	6	20 / 25	1 / 1/4	25 / 40	1/2

*Other sprockets are available upon request.